



 FELISATTI®	Номенклатур
МАШИНА РУЧНАЯ ЭЛЕКТРИЧЕСКАЯ СВЕРЛИЛЬНАЯ	Д-16/1050P2
MANUAL ELECTRIC DRILLING MACHINE	F90026

FELISATTI		Номер на схеме	WEL	
Артикул	Наименование детали		Spare part ID	N
		Drawing number		
610.00010001	Винт	1		Cross J
610.00020004	Крышка корпуса редуктора	2		Head s
610.00030035	Шпиндель	3		Output
610.00040010	Подшипник	4		Bearin
610.00050011	Стопорное кольцо	5		Elastic
610.00060011	Стопорное кольцо	6		Elastic
610.00070032	Шестерня	7		Big tee
610.00080010	Подшипник	8		Bearin
610.00090010	Подшипник	9		Bearin
610.00100006	Вал	10		Three-
610.00110032	Шестерня	11		Seconc
610.00120010	Подшипник	12		Bearin
610.00130010	Подшипник	13		Bearin
610.00140006	Вал	14		Seconc
610.00150032	Шестерня	15		Helical
610.00160010	Подшипник	16		Bearin
610.00170009	Штифт	17		ST1 C
610.00180042	Промщит	18		Middle
610.00190002	Шайба	19		ST1 W
610.00200010	Подшипник	20		Bearin
610.00210001	Винт	21		Cross J
610.00220037	Статор	22		Stator
610.00230043	Пружина статора	23		ST1 pu
610.00240036	Ротор	24		Rotor a
610.00250010	Подшипник	25		Bearin
610.00260044	Втулка подшипника	26		Mixer
610.00270045	Диафрагма	27		Winds
610.00280046	Корпус двигателя	28		Chassi
610.00290047	Шильдик	29		Trader
610.00300029	Щёткодержатель	30		ST1 B
610.00310031	Щётка угольная	31		ST1 ca
610.00320028	Крышка щётчного узла	32		ST1 B
610.00330048	Крышка корпуса двигателя	33		Rear c
610.00340001	Винт	34		Cross J
610.00350041	Шнур сетевой	35		Cable
610.00360026	Трубка защитная шнура	36		ST1 ca
610.00370001	Винт	37		Cross J
610.00380049	Корпус ручки левая часть	38		Left ha
610.00390001	Винт	39		Cross J

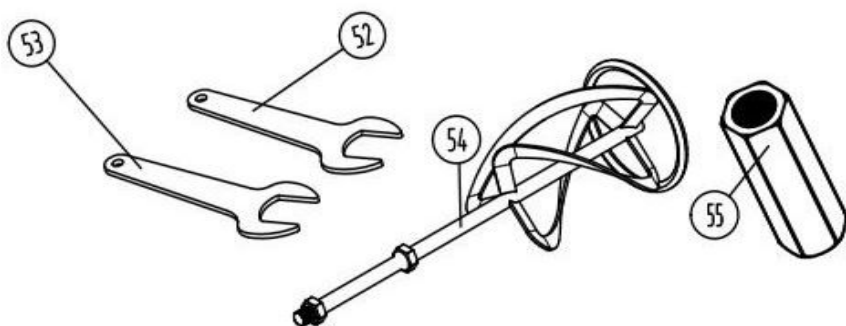

ный перечень деталей		12.02.2024	
Spare parts list		Действителен с / Valid from	
	Артикул изделия	610 .**.**.**.**	
	Product ID	F90026	
EE			
		Разборная схема	
ame of the spare part	Характеристика	шт.в изд	Штрих код
	Technical parameters	pcs per unit	Bar code
pan head self-tapping screw	ST5*50	4	
hell	YL102	1	
t shaft	#45	1	
g	6003-RS（胶盖）	1	
retaining ring for hole	φ35	1	
retaining ring for shaft	φ17*1	1	
ath	40Cr	1	
g	608-ZZ（铁盖）	1	
g	608-ZZ（铁盖）	1	
stage drive gear shaft	40Cr	1	
lary drive teeth	40Cr	1	
g	608-ZZ（铁盖）	1	
g	608-ZZ（铁盖）	1	
lary drive gear shaft	40Cr	1	
l teeth	40Cr	1	
g	608-ZZ（铁盖）	1	
ylindrical positioning pin	φ5*10	1	
e cover	YL102	1	
ool pad	φ22*φ10*1.5	1	
g	6000-ZZ(人本)	1	
pan head self-tapping screw	ST5*50	2	
assembly	φ76*39	1	
ll spring	铜丝	2	
assembly	φ45.5*39	1	
g	608-ZZ(人本)	1	
608 bearing sleeve	φ25*10 PVC	1	
hield	PA6+30GF	1	
s	PA6+30GF	1	
nark	不干胶	2	
rush grip	φ25*31	2	
arbon brush	6.5*12	2	
rush grip cover	PA6+GF30	2	
over	PA6+GF30	1	
pan head self-tapping screw	ST4*28	4	
(rubber wire)	H07RH-F	1	
ble sheath	PVC	1	
pan head self-tapping screw	ST4*16	3	
ndle	PA6+GF30-TPR	1	
pan head self-tapping screw	ST4*16	2	

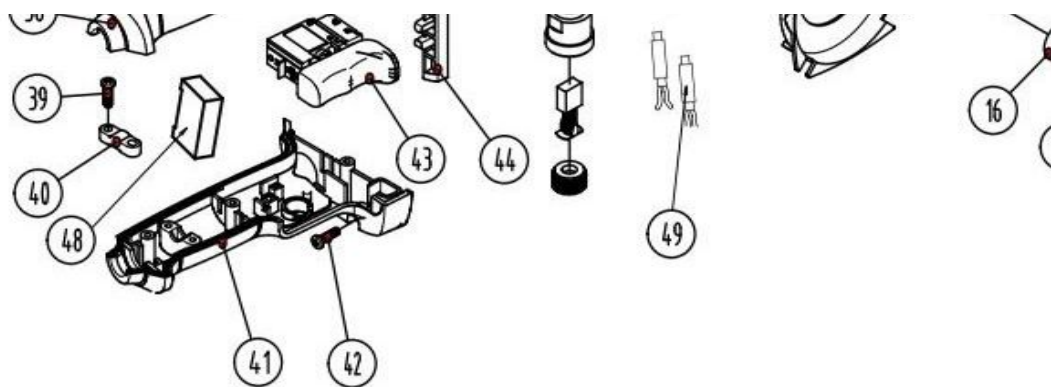